

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : C02F 9/00	A1	(11) International Publication Number: WO 96/30309 (43) International Publication Date: 3 October 1996 (03.10.96)
(21) International Application Number: PCT/US96/04480 (22) International Filing Date: 29 March 1996 (29.03.96) (30) Priority Data: 08/414,217 31 March 1995 (31.03.95) US (71) Applicant: THE COCA-COLA COMPANY [US/US]; 310 North Avenue, Atlanta, GA 30313 (US). (72) Inventors: PLESTER, George; The Coca-Cola Company Belgique, Chaussée de Mons 1424, B-1070 Brussels (BE). VANDEKERCKHOVE, Sijm; The Coca-Cola Company Belgique, Chaussée de Mons 1424, B-1070 Brussels (BE). (74) Agents: MUNCY, Joe, McKinney et al.; Birch, Stewart, Kolasch & Birch, L.L.P., P.O. Box 747, Falls Church, VA 22040-0747 (US).	(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	
(54) Title: ON PREMISE WATER TREATMENT METHOD (57) Abstract <p>A water treatment method uses a removable, disposable cartridge having an internal mesh structure. A permanent heater heats water fed to the cartridge. Precipitated solids collect on the mesh surface provided temperature and residence time are appropriately maintained. The heat breaks down the bicarbonate hardness of the water thereby depositing carbonates on the mesh surface and heavy metals will be codeposited due to the resultant change in pH. The cartridge has a head-space for collecting entrained gases such as volatile organic compounds, chlorine and air. Water sterility is achieved by heating the water over an appropriate period of time. Turbidity is removed within the cartridge due to settling induced by the low fluid velocity controlled by a controller and by a filter provided at the outlet of the cartridge. The filter will become blocked when bicarbonate hardness is carried over forcing a user to replace a spent cartridge. Heat economy and a cool treated water outlet stream are secured by use of a heat exchanger. Water is fed from the cartridge, through the heat exchanger to a storage tank. Water in the storage tank is kept out of contact with air by a movable barrier. Eventually, the water is fed from the storage tank to a dispenser and can subsequently be used in a post-mix beverage dispenser.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SS	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			YN	Vanuatu

ON PREMISE WATER TREATMENT METHOD

BACKGROUND OF THE INVENTION

Filter of the Invention

The present invention relates to a water treatment method for use in a post-mix beverage dispenser.

5 Description of the Background Art

In some locations, water sterility is a health issue, and restricts the use of on premise beverage preparation machines (generally referred to as "post-mix" equipment). Where water is to be used in beverage
10 preparation, excessive bicarbonate hardness is undesirable, since it reduces the acidity of the beverage and affects taste. Volatiles in water, such as organics and chlorine also can have an affect on its taste. Particularly halogenated organics (tri-
15 halomethanes, generally described as THMs) have recently given rise to consumer concerns and regulatory restriction. Suspended matter and turbidity reduces the quality of water both when consumed alone, and on mixing to produce a beverage. Finally, in certain locations,
20 consumers have also shown concerns regarding the heavy metal content of water, and this too has been the subject of legislation in some countries.

Dissolved air in raw water, although not in itself a water quality aspect, can reduce the effectiveness of
25 carbonation in post-mix equipment, and make dispensing difficult due to foaming. A means of deaerating water is advantageous for such equipment. It is noted that

water deaeration is always carried out prior to carbonation in bottling and canning plants.

Therefore, a simple method for in-house, or in-store, removal of microbiological contamination, bicarbonate hardness, volatile organic compounds (VOCs) - particularly THMs - as well as chlorine and heavy metals, is important for meeting certain consumer concerns, raising the quality of drinking water in some locations, and improving the taste of on premise prepared beverages in certain outlets. Additionally, deaeration of water is highly desirable for post-mix outlets, and can lead to reduced foam on dispensing and better beverage quality. However, on premise water treatment systems must meet the following criteria:

- Low cost of original equipment;
- High reliability in absence of technical monitoring or controls;
- All the above-stated quality criteria (i.e. sterility, bicarbonate hardness, chlorine, THMs/VOCs, turbidity, heavy metals and desirably, deaeration);
- Simple, convenient, safe operation by non-qualified people (i.e. in-store or in-home);
- Low cost of maintenance and operation; and
- Low space-utilization.

Currently available systems for use in-home and/or in-store do not meet all the quality and other criteria. Such systems include carbon filtration systems. These systems only address chlorine and VOCs/THMs, but organics are effectively removed only when the filter is regularly maintained. When maintenance is poor, such devices can actually act as biological contaminators. Thus, carbon filtration systems can cause problems in one area while inadequately addressing other areas.

Another conventional system uses reverse osmosis. Such a system addresses bicarbonate hardness, heavy metals and microbiological contaminants only. Reverse

osmosis systems require significant maintenance. Moreover, VOCs/THMs are not treated and these together with chlorine, can actually damage the reverse osmotic membrane and reduce its effectiveness.

5 Simple ion-exchange systems are also known. These systems normally address only bicarbonate hardness or, if more complicated, the total metal and salt content of water. However, these systems need regular maintenance such as the regeneration of the ion-exchange resin. If
10 such maintenance is not carried out, these systems can actually produce treated water of worse quality than untreated water. Chlorine is untreated and can damage the ion-exchange resins in these systems. Moreover, VOCs/THMs are untreated and microbiological contaminants
15 are not only untreated but may actually be significantly increased due to microbiological growth on the resin.

Simple filtration has been used where turbidity is a water quality issue. Such filtration addresses this criteria only, and can increase microbiological
20 contamination if not regularly maintained.

Water sterilization systems using chemicals are known. Such systems address only the microbiological contaminant criterion and need careful maintenance to ensure that chemicals cannot pass into the treated
25 water.

None of these above-mentioned conventional systems are easily maintained by the non-expert user. Moreover, all of these systems have significant penalties if the user fails to carry out proper maintenance. Although
30 none of the above-mentioned systems meet the whole set of quality criteria discussed, all but the simplest and least reliable are costly both to buy and maintain.

U.S. patent 4,844,796 to Plester teaches the principles of heat treating water. This systems,
35 however, includes carbon and sand filtration in a first cartridge section and further filtration and an activated carbon screen in a second cartridge section.

It is desired to avoid such filtration and to expand the water treatment quality criteria.

SUMMARY OF THE INVENTION

Accordingly, it is a primary object of the present invention to provide an improved method for treating all the water quality criteria named (i.e. microbiological contamination, bicarbonate hardness, VOCs/THMs, chlorine, turbidity and heavy metals).

It is a further object of the present invention to provide a method which is simple, cheap, compact, involves low and non-expert maintenance and has no water quality risk if the user does not properly maintain the system.

In this regard, it is a further object of the present invention to provide a method wherein the user is forced to take steps to maintain the system.

A further object of the present invention is to provide a method wherein the apparatus remains hot until treatment is completed to thereby avoid microbiological recontamination.

These objects are also fulfilled by a method of treating water for use in a post-mix beverage dispenser comprising the step of providing a housing having a collector, an inlet, an outlet and a head-space. The housing defines a water treatment chamber and receives water through the inlet. The method further comprises the steps of heating the water in the water treatment chamber for a predetermined period of time to break down bicarbonate hardness in the water and providing a collector on which precipitates from the water can be deposited. Gases disentrained from the water are collected in the head-space of the housing and water from the outlet is received in a storage tank. The method further comprises the step of keeping the water stored in the storage tank out of contact with air or other gases in a headspace of the storage tank by

providing a collapsible water chamber including a movable hermetic barrier contacting the water in the storage tank and capable of following changes of water volume in the water chamber.

5 Moreover, these objects are fulfilled by a method of treating water for use in a post-mix beverage dispenser comprising the steps of introducing water into a housing, the housing having a collector and a head-space and heating the water in the housing to break down
10 bicarbonate hardness in the water. Carbonates are deposited on the collector and heavy metals are codeposited on the collector due to change in pH of the water. The method further comprises the steps of
15 collecting gases disentrained from the water in the head-space of the housing and maintaining the water in the housing for a predetermined period of time. The water is heated during at least the predetermined period of time. The water is then supplied from the housing to
20 a storage tank and the water stored in the storage tank is kept out of contact with air or other gases in a headspace of the storage tank by providing a collapsible water chamber including a movable hermetic barrier contacting the water in the storage tank and capable of following changes of water volume in the water chamber.

25 A method for satisfying these and other objects further comprises the step of introducing water into a housing or cartridge, the housing having a collector and a filter. The filter has a shorter useful life than the collector. The water is moved through the housing with
30 the water first flowing through the collector and then through the filter. The method further includes the step of heating the water in the housing to break down bicarbonate hardness in the water thereby depositing carbonates on the collector. The carbonates gradually
35 reduce proper functioning of the collector. A condition of the filter which changes as a function of the depositing of said bicarbonates thereon which will

eventually block the flow of water through the filter is monitored. The collector will only partially be blocked when the filter is completely blocked such that water could flow through the collector but the flow of water
5 through the collector is prevented by the blocking of the filter. This blocked filter will therefore signal the need for maintenance of the collector.

Further scope of applicability of the present invention will become apparent from the detailed
10 description given hereinafter. However, it should be understood that the detailed description and specific examples, while indicating preferred embodiments of the invention, are given by way of illustration only, since various changes and modifications within the spirit and
15 scope of the invention will become apparent to those skilled in the art from this detailed description.

BRIEF DESCRIPTION OF DRAWINGS

The present invention will become more fully understood from the detailed description given
20 hereinbelow and the accompanying drawings which are given by way of illustration only, and thus are not limitative of the present invention, and wherein:

Figure 1 shows the basic apparatus used with the method of the present invention;

25 Figure 2 shows an alternative arrangement for the product water storage tank of the present invention;

Figure 3 shows an alternative control system using electrical heating;

30 Figure 4 shows an alternative gas heating system of the present invention; and

Figure 5 shows a reduced scale, perspective view of a cartridge used in the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring in detail to the drawings and with
35 particular reference to Figure 1, the apparatus of the

present invention is shown. This apparatus includes a removable/disposable housing or cartridge 1 having a mesh structure 2 and a float valve 3. The interior of cartridge 1 forms a water treatment chamber. The mesh
5 structure 2 can be metal or plastic. The mesh structure 2 acts as a collector means through which water flows as will be described below.

Optional baffles 4 may be provided in the mesh structure 2 in cartridge 1. These baffles 4 guide the
10 water along a tortuous path from one end of the cartridge 1 to another as indicated by the arrows. The baffles 4 can be either metal or plastic and will ensure good distribution, avoidance of short-circuiting and good particle settling.

15 In Figure 5, the toroidal shape of cartridge 1 can be seen. In other words, the cartridge 1 has a cylindrical shape with a longitudinal cavity 5. This cavity 5 is shown as terminating within the cartridge 1, but this cavity 5 could extend completely through the
20 cartridge 1.

As Figure 1 shows, cartridge 1 is heated by an internal heater 6 or an external heating-mantle 6a (as indicated in dotted lines). The internal heater 6 is inserted into the centrally located cavity 5. While
25 cartridge 1 is disposable, the internal heater 6 or heating-mantle 6a act as a permanent heating means. The cartridge 1 is insertable on or into either of these heaters and is readily removable therefrom. It is contemplated that only one heater 6 or 6a will be used;
30 however, both heaters can be used, if necessary. The external heating-mantle 6a can surround all of the generally cylindrical cartridge 1 or only a part of this cartridge. Of course, other heating arrangements should be readily apparent to those skilled in the art.

35 Internal pipes are arranged within the cartridge 1. These pipes includes inlet pipe 7 which ducts incoming untreated water to the base of cartridge 1. An outlet

pipe 8 ducts the treated water from the top of the cartridge 1. These pipes 7 and 8 can respectively be considered as a water inlet and a water outlet to the water treatment chamber in cartridge 1.

5 The cartridge 1 is located within the apparatus by a removable head 9. Cartridge 1 can be screwed onto head 9 or attached thereto by any other suitable means. This head 9 and cartridge 1 merely need to be connected such that water will not leak from cartridge 1.
10 Suitable gaskets or O-rings can be used to ensure an hermetic seal between head 9 and cartridge 1, if so desired.

 The head 9 contains the inlet/outlet water piping and a vent 10 for the gases as will be explained below.
15 Vent 10 can simply be a pipe extending from the interior of the cartridge 1. The cartridge 1 is readily removable from an insulating mantle 41. This mantle 41 can easily be opened to provide access for changing cartridge 1.

20 Head 9 is removable from cartridge 1. The head 9 can be extracted from mantle 41 with the cartridge 1 or alternatively, can be separated from the cartridge 1 and remain within this mantle 41. Appropriate couplings (such as quick release couplings) are provided for the
25 pipes 7, 8 and vent 10 so that these elements can readily be connected or disconnected to existing piping structure within the cartridge 1. Alternatively, these pipes 7, 8 and vent 10 can simply be inserted into the cartridge 1 when head 9 is placed on the mantle 41. One
30 skilled in the art should appreciate many different arrangements whereby the cartridge 1 can be readily inserted into and removed from mantle 41.

 Untreated raw water indicated by numeral 15 enters the system through water main 52. This water passes
35 through valve 54 and a mechanical flow control 16. Valve 54 can be omitted and control means 16 can act as

the sole inlet control between the water main 52 and cartridge 1.

The control means 16 controls flow of the water through the cartridge 1. The control means or flow control 16 will control the velocity of the water
5 through the cartridge 1 such that the water will remain in the cartridge for a predetermined period of time, usually 10-60 minutes.

The water in inlet pipe 7 travels through a heat
10 exchanger 18. The raw water 15 is heated by outgoing treated water indicated by numeral 19. This will reduce the temperature of product water 20 close to the temperature of the incoming raw water 15.

The heated raw water 21 will enter cartridge 1 and
15 be ducted to the base of the cartridge by the inlet pipe 7. This water will then rise through the cartridge 1 being heated by the internal heater 6 or the external heating-mantle 6a. The water will rise to the level of the float valve 3 and will be ducted out of the
20 cartridge 1 by the outlet pipe 8.

Gasses disentrained within the cartridge 1 consists mainly of whatever VOCs/THMs, air and chlorine are dissolved in the raw water as well as carbon dioxide formed during the heat induced decomposition of
25 bicarbonate. In particular, volatiles will be removed due to the rise in temperature and attendant reduction in solubility of the water. These volatiles will also be removed by the stripping effect of dissolved air and nascent carbon dioxide generated by the breakdown of
30 bicarbonate hardness.

Gasses collect in the head-space 11 of the cartridge 1 and are released periodically together with steam by float valve 3. These gasses are then vented through vent 10. Solids contained in the raw water 15,
35 or formed by the decomposition of bicarbonates, or heavy metals whose solubility has been reduced, are deposited in the mesh structure 2 of cartridge 1. The

bicarbonates, heavy metals and any other precipitates from the water can be considered as certain precipitated solids which are collected by the mesh structure (collector means) 2.

5 In particular, precipitated solids collect on the surface of the mesh structure 2 provided the process criteria (temperature and residence time) are appropriately maintained. The heat from internal heater 6 or heating-mantle 6a will break down the bicarbonate
10 hardness, depositing carbonates on the mesh structure 2. Accordingly, the cartridge 1 is a reaction chamber in which bicarbonate is removed out of solution in the water by thermal decomposition, which changes the bicarbonate to carbonate and carbon dioxide. The
15 carbonate is insoluble and deposits as a hard "fur" (clinging sediment) on the mesh structure 2 and other hot surfaces within the disposable cartridge 1.

As will be explained below, these deposits eventually reduce the internal capacity of the cartridge
20 1 to a point beyond which the thermal decomposition can no longer be completed because the reduced space in the cartridge results in a reduction in the treatment time available for the water in the cartridge. In other words, carbonates and heavy metals are codeposited and
25 gradually fill up the cartridge 1 reducing its void space and thus reducing residence time of the water in the cartridge. The heavy metals are codeposited with the carbonates due to the resultant change in pH of the water. As the residence time is reduced, so is the time
30 available for the precipitation to take place. At some point, when the deposits have reached a certain level and the voidage within the cartridge has been reduced to a certain degree, there is no longer sufficient space in the cartridge 1 to achieve minimum residence time needed
35 to complete the precipitation process. Then water with precipitable dissolved solids will enter a polishing

ring filter 22. This ring filter 22 will be described in more detail below.

As set forth above, the cartridge 1 has a free internal gas/liquid surface at head-space 11 where volatiles are collected and discharged by the internally operated valving device 3. The volatiles (VOCs/THMs and chlorine) are removed due to the rise in temperature and attendant reduction in solubility and also by the stripping effect of dissolved air and of nascent carbon dioxide generated by the breakdown of bicarbonate hardness. Water sterility is achieved by heating the water over an appropriate time period. Turbidity is removed within the cartridge 1 due to settling induced by the low fluid velocity controlled by the control means 16 and by the fine filtration mesh or filter 22.

The ring filter 22 is a filter means. The water at the top of the cartridge is ducted through this ring filter 22 which acts as a polishing filter. Cotton-wool, fine sand and/or plastic granules, porous plastic or similar material can be used for filter 22. Any material suitable for fine, depth-filtration can be used for ring filter 22. The filter 22 will initially have a function of removing or polishing minute carry-over of solids in solid (i.e. non-dissolved) form. The filter 22 is arranged to be in contact with either the internal heater 6 or alternatively, the heating-mantle 6a. The water leaving the filter 22 will eventually enter the outlet pipe 8 and leave cartridge 1.

Bicarbonate escaping the mesh structure 2 (due to inadequate decomposition in cartridge 1) will deposit on filter 22. Until water with precipitable dissolved solids enters the ring filter 22, this filter generally only removes odd specks of escaping solid. In other words, carry-over of dissolved solids should not normally reach filter 22, since such dissolved solids should be deposited on mesh structure 2; however, when the voidage within the mesh structure 2 is reduced and

the cartridge 1 is spent, precipitable dissolved solids will carry-over to ring filter 22. Since the ring filter 22 contacts the internal heater 6 and/or the heating-mantle 6a, it will be heated and the non-completed precipitation will continue or be completed in the filter 22. Carry-over of dissolved solids would normally pass through filter 22 and not affect it. Because ring filter 22 is heated, however, a post-reaction is induced and the non-completed precipitation will continue or be completed.

Because the filter 22 has minute pores compared to the mesh structure 2, the filter 22 fills and blocks very quickly due to the carry-over. These deposits will signal the need to change cartridge 1. Such bicarbonates will decompose and block ring filter 22 rendering the cartridge unusable. The user will then be forced to exchange the cartridge for a fresh one.

Water would continue to pass through the mesh structure 2 except that the blocked filter 22 prevents such flow. In other words, if the filter 22 were not present, water would continue to flow through the mesh structure 2 and exit the filter. While some purification of the water would occur, the water exiting the cartridge 1 would not be adequately treated. Because filter 22 is present, water flow will terminate when this filter becomes blocked due to bicarbonates being carried over. The condition of the filter 22 will change as a function of the depositing of bicarbonates thereon. This condition of filter 22 can be monitored. When the filter 22 is eventually blocked, the user will therefore be automatically signaled of the need for maintenance of the mesh structure (collector means) 2. When the filter 22 is blocked, the cartridge 1 is basically spent and the cartridge outlet blocked. The user will therefore be forced to replace cartridge 1.

Water sterility is achieved with the present apparatus by heating the water over an appropriate

period of time under the control of control means 16. Turbidity is removed from the water within the cartridge 1 due to the settling induced by the low fluid velocity and by the filter 22 provided at the outlet of the
5 cartridge.

Outgoing treated water 19 passes into an air-cooler 25. This air-cooler 25 has a conventional fin-type construction for air cooling. Temperature of the treated water 19 is reduced by 5°C. to 20°C. This
10 ensures that the outgoing treated water 19 no longer has a temperature which can cause bicarbonate decomposition and solid deposition within the heat exchanger 18. Such bicarbonate decomposition and solid deposition could render the heat exchanger 18 inoperative. Also, the
15 air-cooler 25 will ensure that incoming raw water cannot be heated within the heat exchanger 18 to a temperature which would induce premature precipitation of dissolved solids in the incoming raw water, and thus lead to ultimate blockage inside the heat exchanger.

20 The heated raw water 21 leaving the heat exchanger 18 has a temperature which is 5°C. to 20°C. lower than the operating temperature of the cartridge 1. This water will quickly reach the correct operating temperature upon entering cartridge 1. A cool treated
25 water outlet stream is secured with the present apparatus and method. The heat exchanger also aids heat economy such that a thermally efficient system is obtained. Also, by reducing the temperature of the treated water, overheating of a downstream dispenser
30 having built-in refrigeration can be avoided.

The operating temperature in cartridge 1 is in the range of 90°C. to 110°C., but may be significantly higher when the water contains a high proportion of sodium or potassium bicarbonates. The temperature is
35 kept as low as practical, within the needs of treatment quality. This will enable the system to operate at a low pressure and to minimize energy consumption.

Preferably, the water will be fed by pressure from water main 52 without the necessity of a water feed pump. Of course, such a pump could be used. The residence time of the water in the cartridge 1 is controlled by the control means 16 and the design of the free volume of the cartridge 1. If a water pump is used, the control means 16 can cause this pump to supply water to the cartridge when appropriate. Residence times of water within the cartridge 1 are in the order of 10-60 minutes as noted above.

The product water 20 enters storage tank 26 from the heat exchanger 18. An air cushion 27 is provided within the storage tank 26. Head-space gases such as air are found in this cushion 27. This air cushion is separated from the stored water 28 by a movable hermetic barrier 29. Barrier 29 contacts the water in water chamber 56 and follows changes in water volume. This barrier 29 will therefore keep the water in the storage tank out of contact with head-space gases. A gaseous head-space will not be permitted to be form above and in contact with the water. The barrier 29 will permit water storage without recontamination of the water with atmosphere.

This movable barrier 29 can be a flexible membrane, a floating platform on the surface of the water in tank 26 or any other suitable structure. If a flexible membrane is used as the barrier 29, it can be made from plastic, rubber or any suitable material. The air cushion 27 is trapped in the head-space of the storage tank 26. Pressure of the air cushion 27 therefore increases as the quantity of stored water 28 increases.

In very small installations, where control simplification is desired, the controls described below can be simplified by allowing the pressure of the air cushion 27 to stop the water flow once this pressure has reached equilibrium with the water main pressure. In such an arrangement, the flow would automatically

restart when stored water 28 is withdrawn and the pressure of the air cushion 27 falls. In such a case, cartridge 1 must be oversized in capacity to deal with the condition of cold starting.

5 Alternatively, as shown in Figure 2, instead of an air cushion 27, the barrier 29 can move a actuator 30. This actuator 30 can be a vertically movable platform within the storage tank 26. Upon reaching a certain height, the actuator 30 will trigger a level switch 31.
10 The level switch 31 is part of the control system of the apparatus described below. When it is necessary to operate with cartridge 1 having a temperature above 100°C., a back pressure on the cartridge 1 can be provided by a simple, conventional spring-relief valve
15 32.

 The purpose of barrier 29 is to permit water storage without recontamination of the water as noted above. The water is out of contact with the ambient environment. Air within the storage tank (such as air
20 cushion 27) is kept out of contact with the stored water 28. The barrier can also prevent the formation of a gaseous head-space in contact with the water in chamber 56.

 The purpose of the storage tank 26 is to enable the
25 sizing of cartridge 1 and its heaters (6 or 6a) to be minimal and compact, by not needing to meet pre-draw requirements. One purpose of the air cushion 27 is to provide a back pressure on the cartridge 1. This will enable operating temperatures in the cartridge above
30 100°C. similarly to the spring-relief valve 32.

 In case of electrical heating as shown in Figure 1, heaters 6 or 6a can be sized to provide fixed heat generation consisting of required sensible heat, plus a small amount of evaporation, plus heat losses.
35 Solenoid-operated stop valve 35 is located in the removable head 9. This stop valve 35 is closed whenever cartridge 1 is below the correct temperature of water

treatment. In such a condition, no steam will be generated in its head-space. Such steam is detected by thermal switch 36 located immediately after head 9.

When thermal switch 36 detects steam, the stop valve 35 opens to permit treated water to flow from cartridge 1. When storage tank 26 is full, the air cushion 27 reaches maximum pressure. This can be detected by pressure switch 37 or level switch 31. Either switch can close a stop valve 35 and turn off the heater 6 or 6a.

As the stored water 28 is withdrawn from the storage tank 26, the pressure on the air cushion 27 falls. The heater 6 or 6a will then be switched back on. However, stop valve 35 does not immediately open. This valve 35 is kept closed by thermal switch 36 until steam is generated and the correct treatment temperature is established. The effluent gasses ducted in pipe 10 of Figure 1 contain mainly steam. These gases are condensed in a finned coiled tube 39. The condensate collects in drip tray 40. In the embodiment shown in Figure 2, the air cushion 27 is replaced by an actuator 30 and the level switch 31 performs all the functions described for the pressure switch 37.

Turning now to Figure 3, a simple on/off thermostat system can instead be used. Because many of the elements in the embodiment of Figure 3 are the same as those of Figure 1, their description will now be omitted. The on/off thermostat system of Figure 3 is used when the heat capacity of the heater 6 or 6a is low enough to permit good temperature control. In this case, the thermal switch 36 is located within the head-space 11 of cartridge 1. This thermal switch 36 will switch heater 6 or 6a on and off by an electrical switch 38.

Figure 1 indicates a dispenser 50 connected to the stored water 28 in storage tank 26. It should be noted that water flows directly from the cartridge 1 to the

storage tank 26 and then to the this dispenser 50 without the need for additional treatment. In particular, there is no chemical treatment of the water after it leaves the cartridge 1. Moreover, chemicals
5 are not added to the cartridge to treat the water therein. Conventional carbon/sand filtration is avoided in the present apparatus while increased water treatment quality criteria are met.

The dispenser 50 indicated in Figure 1 is merely
10 shown as a block diagram. It should be clear to one of ordinary skill in the art that various dispensing arrangements may be incorporated as such a dispenser. Treated water released from this dispenser 50 can be used in a post-mix beverage dispenser. In fact,
15 household or in-store users can tap the water from the storage tank 26 and drink it as treated water without the water going to dispenser 50. This treated water could therefore be used for domestic drinking or cooking purposes.

20 Turning now to Figure 4, an alternate heating arrangement is shown. Because many of the elements in the embodiment of Figure 4 are the same as those of Figure 1, their description will now be omitted. Gas heating is used in this embodiment of Figure 4 instead
25 of internal heater 6. An external heating-mantle 6a may or may not be used depending upon the heating requirements of the apparatus.

Cartridge 1 and head 9 have an internal chimney 44 in the embodiment of Figure 4. Thermal switch 36 is
30 located in the head-space 11 of cartridge 1. This thermal switch 36 will switch gas valve 45 on and off. The gas flame will then be lit by spark plug 46 and ignition will be controlled in a conventional manner to ensure safe operation. The gas supply for the flame can
35 be provided by a gas cylinder 47. The gas cylinder 47 is located beneath the internal chimney 44. The gas

cylinder 47 and gas valve 45 are a part of the heater means of the Figure 4 embodiment.

The arrangement of Figure 4 is easily portable and can be used in many different applications. For example, this arrangement can be used at fairs, picnics or other locations where electrical power is not readily available. If an external heating mantle 6a is also provided, this Figure 4 embodiment can also readily be used when electrical power is available and gas heating is not desired.

Apart from the water treatment apparatus of the present invention, a water treatment method is provided. In this water treatment method, water is introduced into the cartridge 1 and passed through the mesh structure 2. The water is heated by either the internal heater 6, by the external heating-mantle 6a or by a flame from gas cylinder 47. This heating will cause breakdown of bicarbonate hardness of the water. A collector or mesh structure 2 is provided on which the bicarbonate and other precipitates can be deposited. Gasses disentrained from the water are collected in head-space 11. Storage tank 26 is provided to receive the water from the outlet of the cartridge 1. This water is kept out of contact with air or other gases in a head-space of the storage tank 26 by providing a collapsible water chamber 56 including hermetic barrier 29. This barrier 29 contacts the water in the storage tank 26 and follows changes in water volume in the water chamber 56.

The method of the invention further includes the steps of introducing water into the housing or cartridge 1. A collector or mesh structure 2 and head-space 11 are provided in the housing. The water is heated by either the internal heater 6, by the external heating-mantle 6a or by a flame from gas cylinder 47. This heating will cause breakdown of the bicarbonates in the water which will be deposited on the mesh structure or collector 2. Heavy metals will be codeposited on this

mesh structure 2 due to the resultant change in pH of the water. Gasses disentrained from the water are collected in head-space 11. The water is maintained in the cartridge 1 for a predetermined period of time. The
5 water is heated during at least this predetermined period of time, usually 10-60 minutes. The water will then be supplied from housing or cartridge 1 directly to storage tank 26. The water in the storage tank 26 is kept out of contact with air or other gases in the head-
10 space of tank 26 by the barrier 29. This barrier 29 is in contact with the water and follows changes of water volume in the water chamber 56 of the tank 26.

The water in storage tank 26 can be discharged through dispenser 50. There is no chemical treatment of
15 the water from the cartridge 1 to the storage tank 26 and the dispenser 50. Treatment of water quality is substantially completed when the water leaves cartridge 1.

Apart from the above-described methods, the present
20 invention also provides for a method for treating water for use in a post-mix beverage dispenser wherein the ability of the system to treat the water can be monitored. In this method, water is also introduced into housing or cartridge 1. The water will move
25 through the housing by first flowing through the collector or mesh structure 2 and then through the filter 22. The filter 22 has a shorter useful life than the collector. The internal heater 6, the external heating-mantle 6a or the flame from gas cylinder 47 will
30 heat the water within housing or cartridge 1. Bicarbonate hardness of the water will be broken down and carbonates will be deposited on the collector or mesh structure 2 thereby gradually reducing its proper functioning. A condition of the filter 22 will change
35 as a function of the depositing of the bicarbonates on the mesh structure 2 such that the filter 22 will monitor the condition of the filter. The filter 22 will

become completely blocked before the mesh structure 2 to thereby stop the flow of water. This blocked filter 22 will therefore signal the need for maintenance of the collector or mesh structure 2. Because the flow of water will terminate, a user will be forced to replace a spent cartridge 1.

The apparatus and method of the present invention required little control, are simple to maintain and operate and are relatively inexpensive. In particular, the disposable cartridge 1 is relatively simple and the non-disposable contents of the apparatus require little maintenance. Therefore, the apparatus can economically treat water without entailing high capital expenditures.

The present apparatus and method reduce water hardness and provide sterile water while removing many impurities of the water. A simple method for in-home or in-store removal of microbiological contaminants, bicarbonate hardness, VOCs/THMs, chlorine, heavy metals and deaeration of water is provided. High reliability in the absence of technical monitoring or controls is obtained. This apparatus and method are simple, convenient and can safely be operated by non-qualified personnel. Moreover, this apparatus and method require only limited space thereby further reducing the overall cost.

The invention being thus described, it will be obvious that the same may be varied in many ways. Such variations are not to be regarded as a departure from the spirit and scope of the invention, and all such modifications as would be obvious to one skilled in the art are intended to be included within the scope of the following claims.

WHAT IS CLAIMED:

1. A method for treating water comprising:
 - providing a housing having a collector, an inlet, an outlet and a head-space, the housing defining a water treatment chamber, the housing receiving water through the inlet;
 - 5 heating the water in the water treatment chamber for a predetermined period of time to break down bicarbonate hardness in the water;
 - providing a collector on which precipitates from the water can be deposited;
 - 10 collecting gases disentrained from the water in the head-space of the housing;
 - providing a storage tank to receive water from the outlet of the housing; and
 - 15 keeping the water stored in the storage tank out of contact with air or other gases in a head-space of the storage tank by providing a collapsible water chamber including a movable hermetic barrier contacting the

water in the storage tank and capable of following
20 changes of water volume in the water chamber.

2. The method as recited in claim 1, wherein the
storage tank has an air cushion therein, the movable
barrier separating the water in the storage tank from
the air cushion, the method further comprises the steps
5 of:

exerting pressure on the movable barrier by the air
cushion and by the water in the storage tank, the
pressure on the movable barrier being variable;

10 increasing pressure on the movable barrier by
increasing an amount of water in the storage tank;

decreasing pressure on the movable barrier by
decreasing an amount of water in the storage tank; and

15 preventing flow of water into the storage tank when
pressure exerted on the movable barrier by the air
cushion equals pressure exerted on the movable barrier
by the water in the storage tank.

3. The method as recited in claim 1, wherein the
storage tank has a movable actuator and a level switch,
the movable actuator being in contact with the movable
barrier, the method further comprising the steps of:

5 moving the actuator toward the level switch as
water is introduced into the storage tank;

moving the actuator away from the level switch as
water is discharged from the storage tank;

10 terminating flow of water into the storage tank
when the actuator contacts the level switch, the storage
tank being full when the actuator contacts the level
switch.

4. The method as recited in claim 1, further comprising the steps of:

sensing when the storage tank is full;

5 turning off the heater means when the storage tank is full;

turning the heater means back on when water from the full storage tank is discharged from the tank;

determining temperature within the water treatment chamber; and

10 delaying discharge of water from the water treatment chamber until a predetermined temperature has been reached for a predetermined period of time after the heater means has been turned back on.

5. The method as recited in claim 1, wherein the storage tank has an air cushion therein, the movable barrier separating the water in the storage tank from the air cushion, the method further comprises the step of exerting a back-pressure on the water treatment chamber by the air cushion.

6. The method as recited in claim 1, wherein the collector is a mesh structure with baffles therein, the method further comprises the step of forcing water to flow over a tortuous path through the collector means due to the baffles.

7. The method as recited in claim 1, further comprising the steps of:

5 preheating water by passing the water through a heat exchanger prior to the water being received in the water treatment chamber;

cooling water exiting the water treatment chamber by passing the water through the heat exchanger, heated water exiting the water treatment chamber being used to preheat the water being fed to the water treatment chamber; and

10

reducing temperature of the water before passing the water through the heat exchanger to avoid precipitation of certain solids from the water passing through the heat exchanger.

8. Water treated in accordance with the method of claim 1.

9. A method for treating water comprising:
introducing water into a housing, the housing having a collector and a head-space;
heating the water in the housing to break down
5 bicarbonate hardness in the water;
depositing carbonates on the collector;
codepositing heavy metals on the collector due to change in pH of the water;
collecting gases disentrained from the water in the
10 head-space of the housing;
maintaining the water in the housing for a predetermined period of time, the water being heated during at least the predetermined period of time;
supplying water from the housing to a storage tank;
15 and
keeping the water stored in the storage tank out of contact with air or other gases in a head-space of the storage tank by providing a collapsible water chamber including a movable hermetic barrier contacting the
20 water in the storage tank and capable of following changes of water volume in the water chamber.

10. The method as recited in claim 9, wherein the storage tank has an air cushion therein, the movable barrier separating the water in the storage tank from the air cushion, the method further comprises the steps of:

5 exerting pressure on the movable barrier by the air cushion and by the water in the storage tank, the pressure on the movable barrier being variable;

10 increasing pressure on the movable barrier by increasing an amount of water in the storage tank;

 decreasing pressure on the movable barrier by decreasing an amount of water in the storage tank; and

15 preventing flow of water into the storage tank when pressure exerted on the movable barrier by the air cushion equals pressure exerted on the movable barrier by the water in the storage tank.

11. The method as recited in claim 9, wherein the storage tank has a movable actuator and a level switch, the movable actuator being in contact with the movable barrier, the method further comprising the steps of:

5 moving the actuator toward the level switch as water is introduced into the storage tank;

 moving the actuator away from the level switch as water is discharged from the storage tank;

10 terminating flow of water into the storage tank when the actuator contacts the level switch, the storage tank being full when the actuator contacts the level switch.

12. The method as recited in claim 9, further comprising the steps of:

 sensing when the storage tank is full;

5 turning off the heater means when the storage tank is full;

 turning the heater means back on when water from the full storage tank is discharged from the tank;

determining temperature within the water treatment chamber; and

10 delaying discharge of water from the water treatment chamber until a predetermined temperature has been reached for a predetermined period of time after the heater means has been turned back on.

13. Water treated in accordance with the method of claim 9.

14. A method for treating water comprising:

introducing water into a housing, the housing having a collector and a filter, the filter having a shorter useful life than the collector;

5 moving the water through the housing, the water first flowing through the collector and then through the filter;

heating the water in the housing to break down bicarbonate hardness in the water thereby depositing carbonates on the collector, said carbonates gradually reducing proper functioning of the collector; and

10 monitoring a condition of the filter which changes as a function of the depositing of said bicarbonates thereon which will eventually block the flow of water through the filter, the collector being only partially blocked when the filter is completely blocked such that water could flow through the collector but the flow of water through the collector is prevented by the blocking of the filter,

15 whereby a blocked filter signals need for maintenance of the collector.

15. The method as recited in claim 14, further comprising the step of replacing the filter and the collector whereby the flow of water within the housing can resume to normal desired levels.

16. The method as recited in claim 14, further comprising the steps of:

5 controlling residence time of the water within the housing such that water remains in the housing for a predetermined period of time; and

collecting disentrained gases from water in the housing in a head-space located in the housing.

17. The method as recited in claim 14, further comprising the steps of:

5 forming carbon dioxide within the housing due to the break down of bicarbonate hardness during the step of heating;

10 removing dissolved air and the carbon dioxide from the water in the housing during the step of heating; and removing volatiles from the water in the housing due to the step of heating with an attendant reduction in solubility of the water and due to a stripping effect during the removal of dissolved air and carbon dioxide.

18. Water treated in accordance with the method of claim 14.



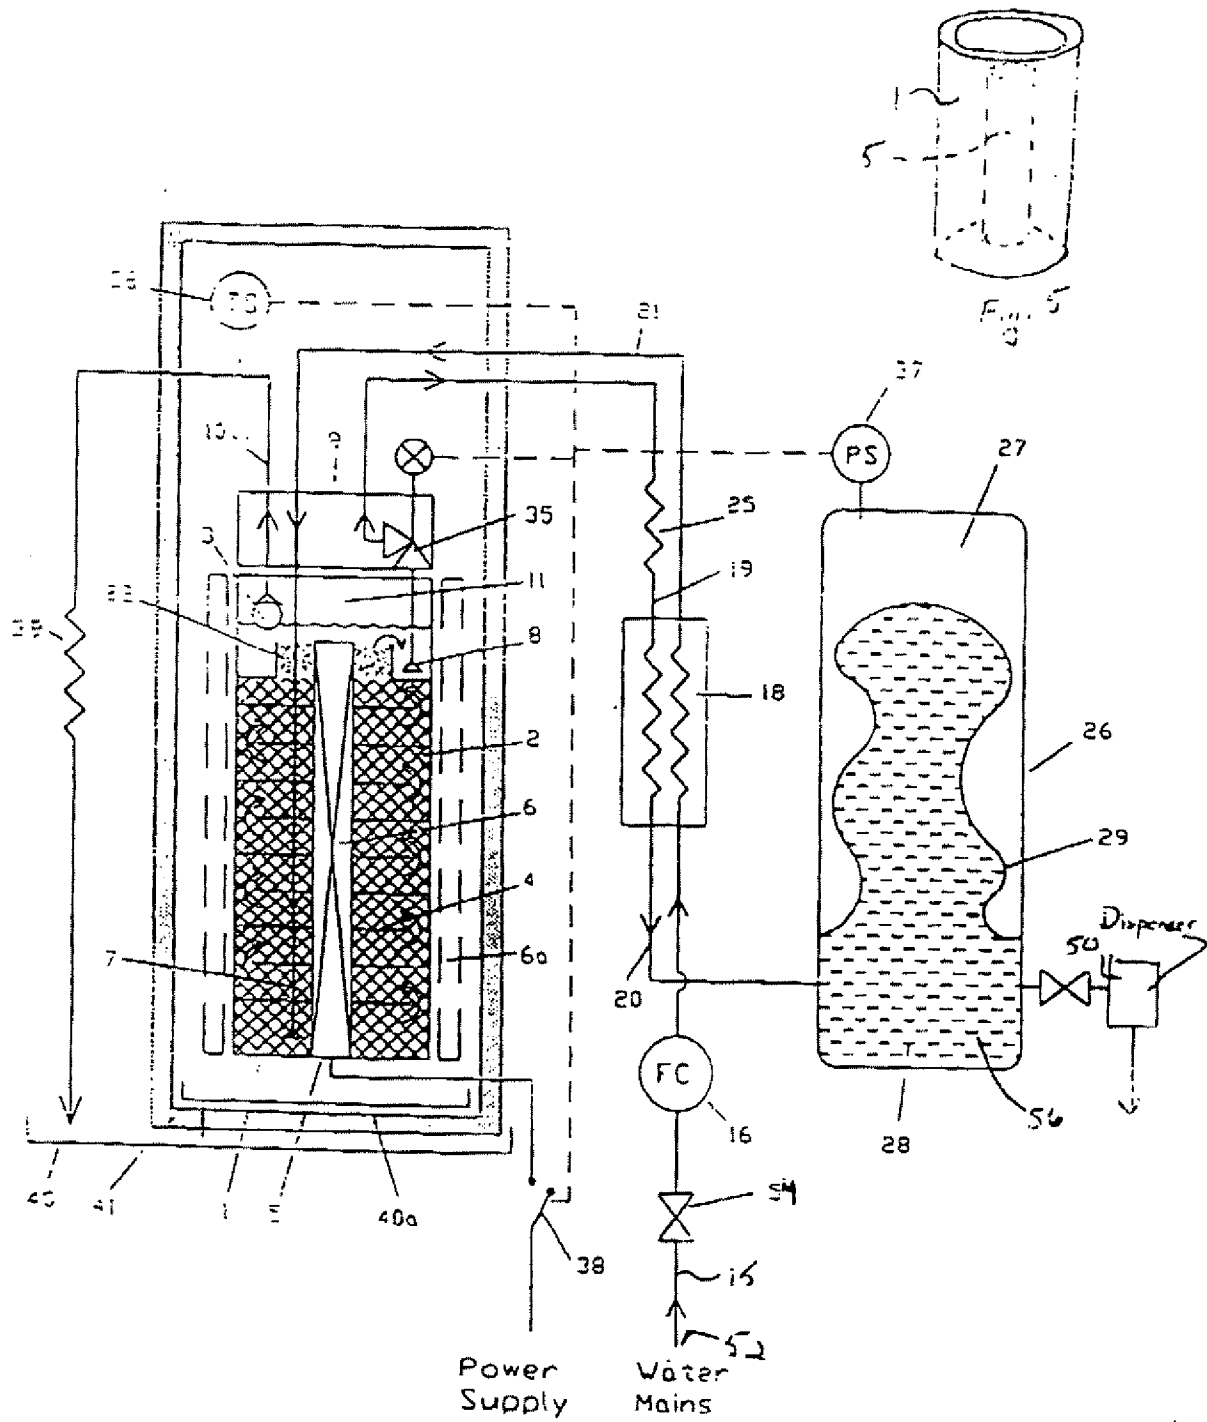


Fig. 1

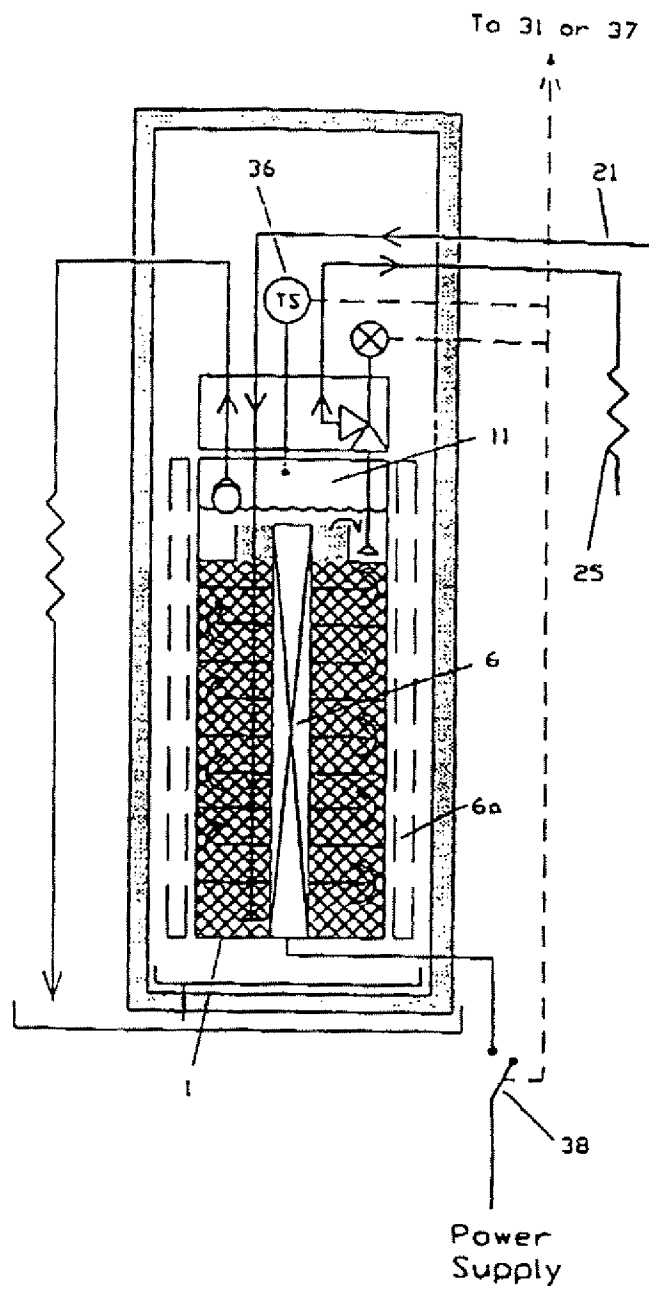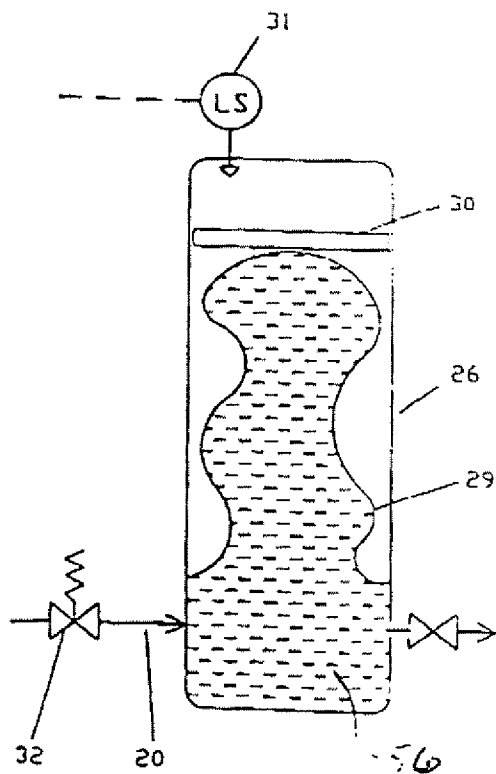

3/3

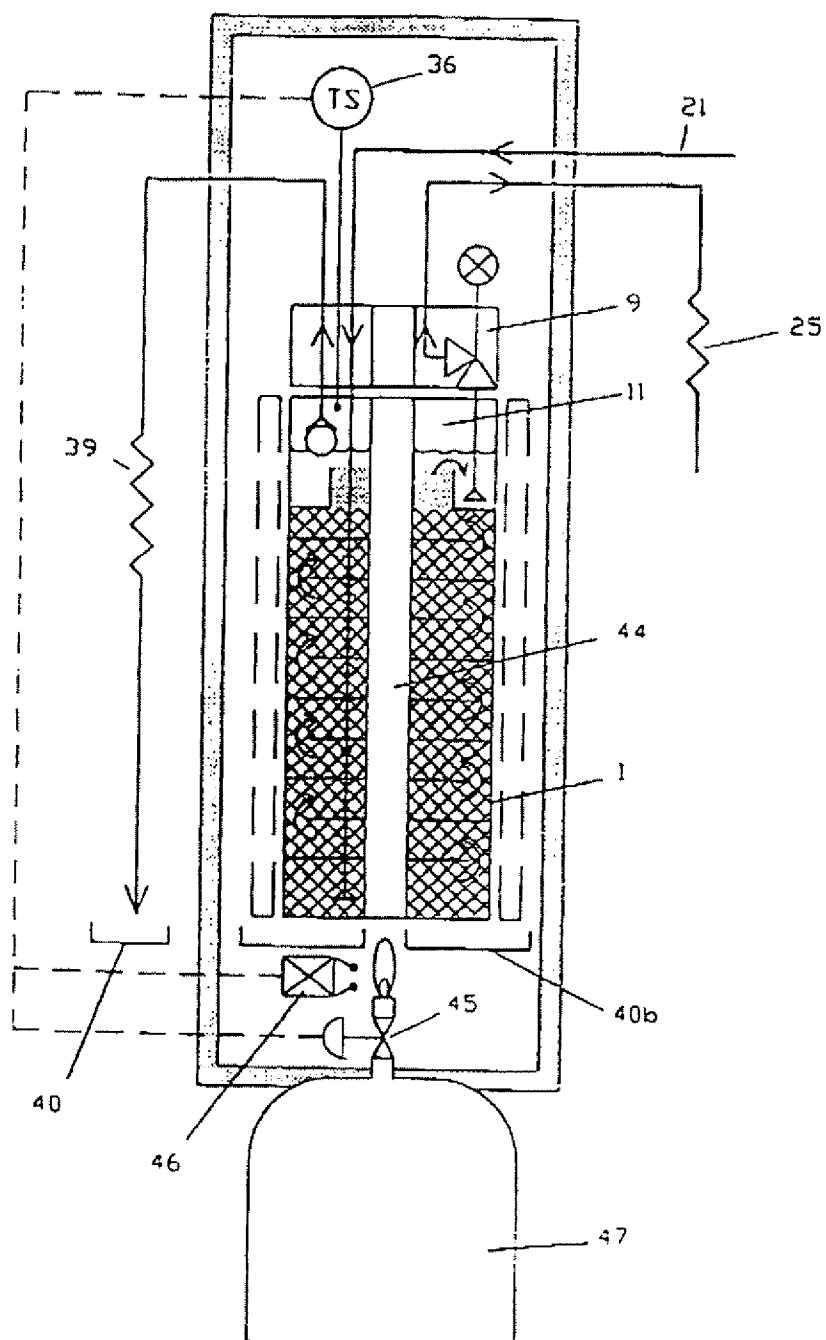


Fig. 4

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 96/04480

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 C02F9/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 C02F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US,A,4 844 796 (PLESTER GEORGE) 4 July 1989 see column 3 - column 6, line 35 ---	1,9,14
Y	US,A,5 017 284 (MILER STEVEN L ET AL) 21 May 1991 see column 11, line 49 - column 12, line 6 ---	1,9,14
A	US,A,3 831 757 (GOSSETT C ET AL) 27 August 1974 see abstract; figure 1 -----	1,9,14

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* documents which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- *A* document member of the same patent family

Date of the actual completion of the international search

5 August 1996

Date of mailing of the international search report

09.08.96

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, TX 31 651 apo nl,
Fax (+31-70) 340-2014

Authorized officer

Kaspers, H

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No.

PCT/US 96/04480

Patent documents cited in search report	Publication date	Patent family member(s)	Publication date
US-A-4844796	04-07-89	AU-B- 2373988	20-04-89
		CA-A- 1313503	09-02-93
		EP-A- 0312079	19-04-89
		JP-A- 1139185	31-05-89
		JP-B- 6036912	18-05-94
US-A-5017284	21-05-91	CA-A- 2036801	28-10-91
		CN-A- 1055910	06-11-91
		EP-A- 0454614	30-10-91
		JP-A- 6292886	21-10-94
		US-A- 5094743	10-03-92
		US-A- 5043066	27-08-91
		US-A- 5053143	01-10-91
		US-A- 5065791	19-11-91
		US-A- 5069785	03-12-91
		US-A- 5076913	31-12-91
		US-A- 5039411	13-08-91
		US-A- 5071548	10-12-91
US-A-3831757	27-08-74	NONE	